


STYLE S26K

**Combination braid of PTFE and Para-Aramid
as corner reinforcement, with run-in lubricant**

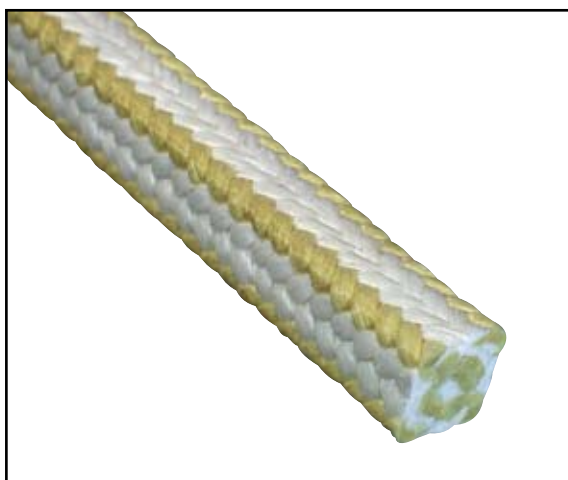

p [bar]	25 (20*)	500	250
v [m/s]	20 (15*)	2	-
t °C	-100 ... +280 (200*)		
pH	2 - 12		
g/cm ³	1.45		

*practically useful data

Main areas of application:

- Plunger pumps
- Dosing pumps
- Blenders
- Pumps
- Mixers
- Kneading devices
- Extruders
- Filters
- Agitators
- Refiners

Characteristics:

- High cross-section density and compactness, still elastic and flexible
- Wear resistant and form stable
- Also suitable for pumps, shaft hardness HRC 50 recommended
- Simplified handling during installation and run-in procedure
- Universal quality for high pressure applications and use with abrasive media
- No contamination of product

Suitable for:

- Chemical, Pulp and Paper industry

Form of delivery:

This packing can be manufactured from 6 to 40 mm square as well as in intermediate, inch sizes and special measurements.

04 - 09 mm	on	1 kg spool	Special length, pre-cut or die formed rings on request.
10 - 15 mm	on	2.5 kg spool	
16 mm and above	on	5 kg spool	

1 kg of packing of the following cross-sections is equivalent to displayed metre lengths:

[size]	06	1/4"	08	3/8"	10	7/16"	12	1/2"	14	15	16	18	19	20	22	25
[m]	19	17	11	7.6	6.9	5.7	5.7	4.3	3.5	3.1	2.7	2.1	1.9	1.7	1.4	1.1

All technical information and advice is based on our experience and will be given most conscientiously but without any liability. Indication and figures need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.