





## STYLE S6

### PTFE-Fibre with PTFE-dispersion and silicon free run-in lubricant

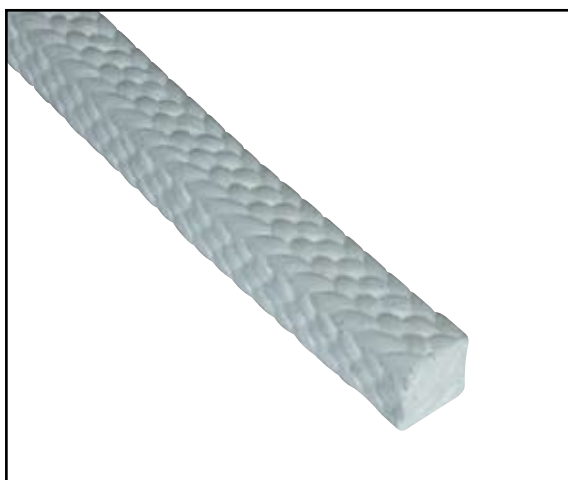

			
p [bar]	15 (10*)	100	100
v [m/s]	10 (8*)	1.5	-
t °C	-50 ... +280 (200*)		
pH	0 - 14		
g/cm <sup>3</sup>	1.70		

\*practically useful data

#### Main areas of application:

- Agitators
- Blenders
- Refiners
- Filters
- Pumps
- Dosing Valves
- Gate valves

#### Characteristics:

- Pliable, easy to compress packing
- Good emergency running properties, does not wear shafts, surface hardness HRC 25 is efficient
- Can also be used as valve packing or as lid seal
- Excellent chemical resistant
- Clean packing should be used where contamination of product has to be avoided
- For applications in food and pharma industries a special product variant S6SIFDA with FDA conformity is available on request

#### Suitable for:

- Chemical industry, generally in strong and concentrated chemicals

#### Form of delivery:

This packing can be manufactured from 3 to 40 mm square as well as in intermediate, inch sizes and special measurements.

04 - 09 mm	on	1 kg spool	Special length, pre-cut or die formed rings on request.
10 - 15 mm	on	2.5 kg spool	
16 mm and above	on	5 kg spool	

1 kg of packing of the following cross-sections is equivalent to displayed metre lengths:

[size]	04	05	06	1/4"	08	3/8"	10	7/16"	12	1/2"	14	15	16	18	19	20	22	25
[m]	37	24	16.3	14.6	9.2	6.5	5.9	4.9	4.2	3.7	3.0	2.6	2.3	1.8	1.6	1.5	1.2	0.9

All technical information and advice is based on our experience and will be given most conscientiously but without any liability. Indication and figures need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.