



EXPERIENCE THE EXCEPTIONAL

AES-15™

Oil Support System



Features

- 316 SS vessel construction
- Enhanced modular design
- Cooling coil as standard
- Vessels are designed and manufactured in accordance with ASME VIII Div.1 and PED 97/23/EC

Benefits

- Robust vessel suitable for a range of challenging environments
- Available in threaded as standard or flanged construction
- Additional cooling available for high heat applications
- Suitable for a wide range of arduous environments. Design rating 30 bar @ 100°C / 435 psi @ 212°F



The AES-15™ vessel forms the core of a robust, low maintenance and highly reliable barrier fluid system. This vessel is constructed with 316 Stainless Steel and is designed to meet the high end needs of the Chemical, Pharmaceutical and Petrochemical industries. The AES-15™ cleverly combines American and European standards, thus allowing the one vessel to accept top entry (float) or side entry (ultra-sonic) level switches. Both oil and water can be used as barrier fluids with the AES-15™, ensuring its compatibility with a wide range of industrial pump applications. The AES-15™ is designed and manufactured to ASME VIII Div.1 and certified by TÜV to cover PED requirements.



Specifications Standard Offering

Vessel:


- Construction:** 316 Stainless Steel
- Pressure limit:** 30 bar / 435 psi
- Temperature limit:** 100°C / 212°F
- Capacity:** 15 litres / 3.96 gal (US)
- Connections:** 1/2" NPT for seal feed and return hoses*
- Finish:** Satin bead blast
- Designed to:** ASME VIII Div.1 and certified by TÜV to cover PED requirements
- 3/4" NPT side entry, 1" NPT top entry**

Weld Pad Level Gauge:

- Body:** 316 Stainless Steel
- Top plate:** 316 Stainless Steel
- Bolts:** 316 Stainless Steel
- Gaskets:** PTFE
- Pressure limit:** 30 bar / 435 psi
- Temperature limit:** 100°C / 212°F

Optional Extras:

- Level Switch:** 1" NPT top entry (float) and 3.4" NPT side entry (ultra-sonic) Explosion Proof and Intrinsically Safe options
- Pressure Switch:** Explosion Proof and Intrinsically Safe options
- Pressure Gauge:** 316 Stainless Steel (wetted parts option available)
- Hand Pump:** Oil & Water options
- Nitrogen Regulator Assembly**

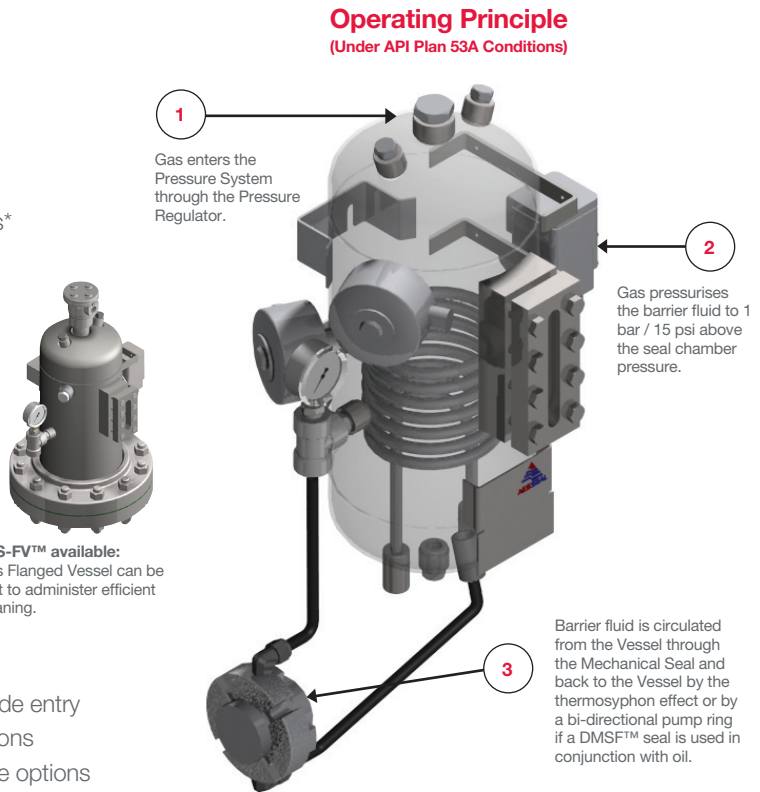

AES-FV™ available:
This Flanged Vessel can be split to administer efficient cleaning.

Barrier & buffer fluid systems for use with double mechanical seals. AESSEAL® supplies an extensive range of barrier and buffer fluid systems for use with double mechanical seals. Wherever possible AESSEAL® prefers to supply both the seal and the system. In addition the company will suggest suitable barrier or buffer fluids for most applications, based on extensive field experience. AESSEAL® accepts no responsibility for any problems associated with system design, installation, operation, or the use of an unsuitable barrier or buffer fluid, where the fluid, seal or any part of the system have not been specified and / or supplied by AESSEAL®

This document is designed to provide dimensional information and an indication of availability. For further information and safe operating limits contact our technical specialists at the locations below.



Use double mechanical seals with hazardous products.

Always take safety precautions: **WARNING**

- Guard your equipment
- Wear protective clothing

UK Sales & Technical advice:

AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham
S60 1BZ
United Kingdom

Tel: +44 (0) 1709 369966
Fax: +44 (0) 1709 720788
E-mail: seals@aes seal.com

Distributed by:

'Our purpose is to give our customers such exceptional service that they need never consider alternative sources of supply.'

www.aes seal.com

USA Sales & Technical advice:

AESSEAL Inc.
355 Dunavent Drive
Rockford
TN. 37853
USA

Tel: +1 865 531 0192
Fax: +1 865 531 0571
E-mail: usa@aes seal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AESSEAL plc, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.