


CDSA™

Range of Double Cartridge Mechanical Seals



- Unique self-aligning inboard and outboard seal faces
- Modular construction for maximum adaptability
- Independent seal face design
- Double or tandem seal protection
- Double pressure balanced rotaries

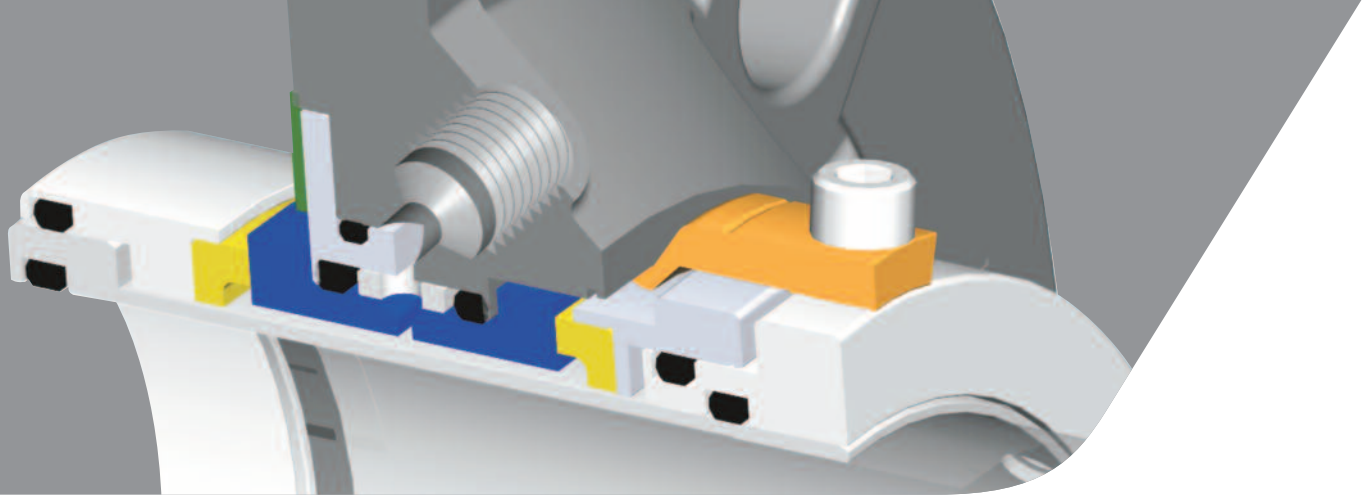

CDSA™ - High Performance Sealing Solution

Containment of hazardous process fluids requires the use of a double seal. Concern over emission control, health and safety issues and adequate back-up protection, intensifies the need for careful specification of the sealing system.



The corrosive nature of some hazardous liquids compounds the problem with the need for exotic “corrosion resistant” metallurgies.

The CDSA™ cartridge double mechanical seal forms the basis of the engineered sealing system. The standard seal unit is 316 Stainless Steel with Carbon, Tungsten Carbide and Silicon Carbide faces, available with Viton®, Aflas®, EPR and Kalrez® elastomers. This fundamental design is changed through modular component options to suit the requirements of the specific application.

Modular Construction

A modular component system is ideal for a flexible engineered approach to each application. Process chemicals have diverse characteristics and one basic seal configuration fails to cover the broad range of possible applications. The need for exotic wetted alloys, various seal face combinations, alternate ‘O’ ring compounds, differential secondary fluid pressures, temperature control and barrier fluid containment systems are some of the design parameters encountered.

Highly corrosive applications aggressively attack Stainless Steel. Corrosion is usually limited to the wetted components; namely the inboard rotary, a portion of the shaft sleeve and a section of the gland. Procurement of exotic alloy seals often results in long lead times and supply delays.

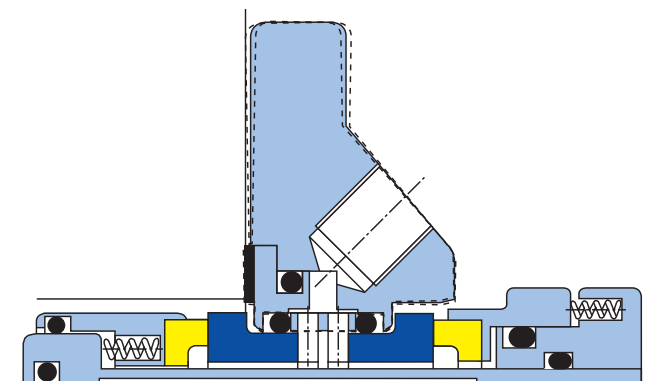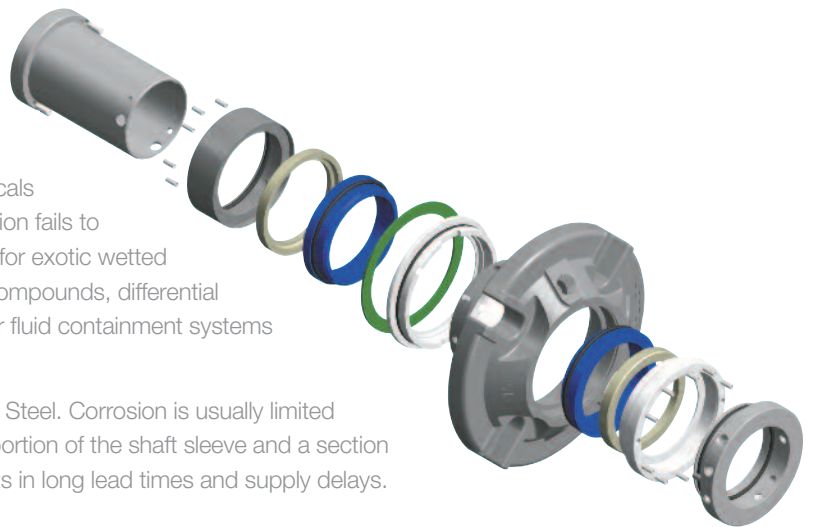

Self Aligning Faces

The second proven design feature, self-aligning faces, ensures that both the inboard and outboard faces remain square (90°), to the rotating shaft. The unique “universal joint” concept means each face remains flat across a broad pressure range. Resistance to pin shear stress during operation is achieved with heavy duty radially mounted anti-rotation pins. A spring loaded internal rotary centrifuges solids away from the seal faces, resisting clogging from process fluids with a high solids content.

Proven Design Features

The basic seal incorporates two proven design features that enhance leak-free performance; cartridge construction and self-aligning faces. Cartridge seals are assembled, pre-set at the factory and tested. This method has proven effective in reducing installation errors due to improper setting of spring compression, radial misalignment and damage to the seal faces from excessive handling.

CDSA™ - Design Features

Performance Documentation


The CDSA™ engineered double seal has been designed with a flexible modular concept, allowing the seal to be adapted to the unique characteristics of each application. This gives you the maximum reliability benefit from our extensive experience.

All cartridge mechanical seals receive an individual serial number, which is etched on the seal during the final hydrostatic pressure test. This facilitates seal-level data monitoring and improved traceability, to help improve application performance over time.

Total adaptability results in maximum control in specifying the correct seal. The CDSA™ provides ultimate flexibility and back-up protection for the hazardous process fluid application.



Advanced seal testing on an API 682 specification test rig

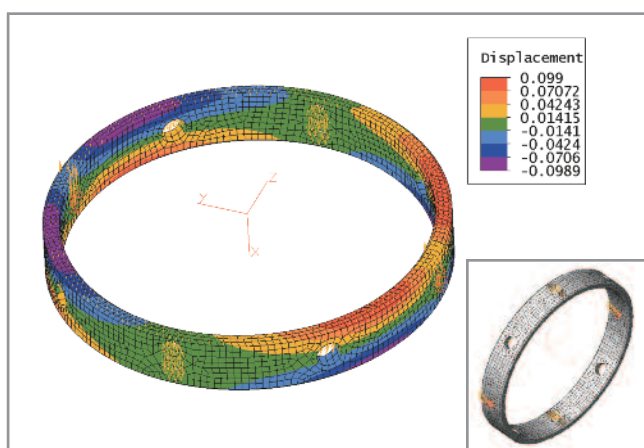

3D Finite Element Analysis review showing displacement of the pivot ring due to the pressure created by the faces and the gland insert.


Finite Element Analysis and Design

With the aid of Finite Element Analysis (FEA), AESSEAL® designed a unique “universal joint self-aligning system”. Modelling the effects of temperature, pressure and rotational shear stress were just a few of the considerations. A rigid back-up ring with radially mounted pins behind the stationary provides compensation for angular misalignment, offering higher pressure capabilities and optimum protection against anti-rotation pin shear stress. In addition, the spring loaded rotary centrifuges solids away from the seal face and resists clogging, increasing the effectiveness of the seal in slurries and some abrasives. Faces remain flat, square to the shaft and suspended solids are prevented from crossing the flat seal faces.

AESSEAL® Design and Testing

For every seal developed by AESSEAL®, we use state-of-the-art computational facilities and numerical tools to design and optimize seal performance prior to manufacture and testing.


These tools include Predictive Software Code developed in-house, Finite Element Analysis (FEA) and Computational Fluid Dynamics (CFD). Our numerical tools are used for seal design, performance optimization, special product application and troubleshooting. In combination with an extensive test programme the result is world-leading technology that keeps your equipment running longer.

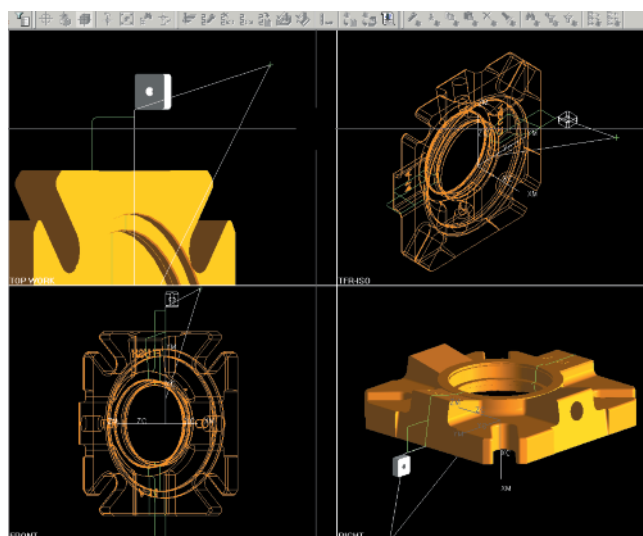

Integrated CAM Programming

CDSA™ Range

Sizes available: 1.000" - 5.000" (24mm - 125mm)

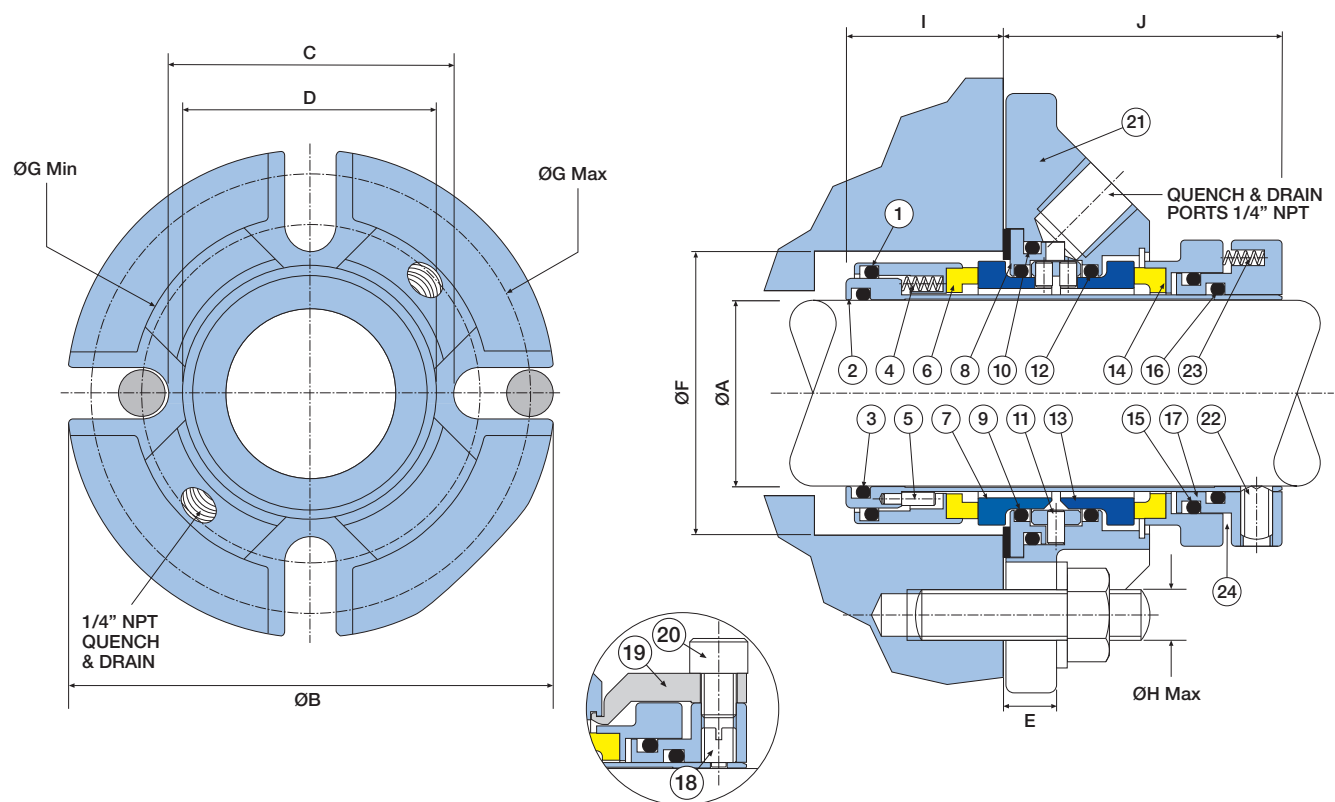

Item	Description	Material	Item	Description	Material
1	Rotary O Ring	Viton® / EPR / Kalrez® / Aflas®	13	External Stationary Face	SiC / Ceramic** / TC
2	Sleeve	316L Stainless Steel	14	Rotating Face	316L SS - Carbon / TC / SiC*
3	Sleeve O Ring	Viton® / EPR / Kalrez® / Aflas®	15	External Rotary O Ring	Viton® / EPR / Kalrez® / Aflas®
4	Springs	Alloy 276	16	Clamp Ring O Ring	Viton® / EPR / Kalrez® / Aflas®
5	Rotating Drive Pins	Stainless Steel	17	Clamp Ring	316L Stainless Steel
6	Rotary Face	316L SS - Carbon / TC / SiC*	18	Anti-Tamper Screws	Stainless Steel
7	Internal Stationary Face	SiC / Ceramic** / TC	19	Centring Clips	Metal
8	Gland Insert	316L Stainless Steel	20	Clip Screws	Stainless Steel
9	Internal Stat O Ring	Viton® / EPR / Kalrez® / Aflas®	21	Gland	316 Stainless Steel
10	Insert O Ring	Viton® / EPR / Kalrez® / Aflas®	22	Drive Screws	Stainless Steel
11	Pivot Ring	316L Stainless Steel	23	Springs	Alloy 276
12	External Stat O Ring	Viton® / EPR / Kalrez® / Aflas®	24	Rotary Drive Pins (not shown)	Stainless Steel

*Limited availability above 4.000" (100mm) - contact AESSEAL® for more information


**Limited availability above 3.000" (75mm) - contact AESSEAL® for more information

Item 5 is an integral part of Item 2

Item 24 is an integral part of Item 17

Large CDSA™

Sizes available: 5.125" - 12.000" (130mm - 300mm)

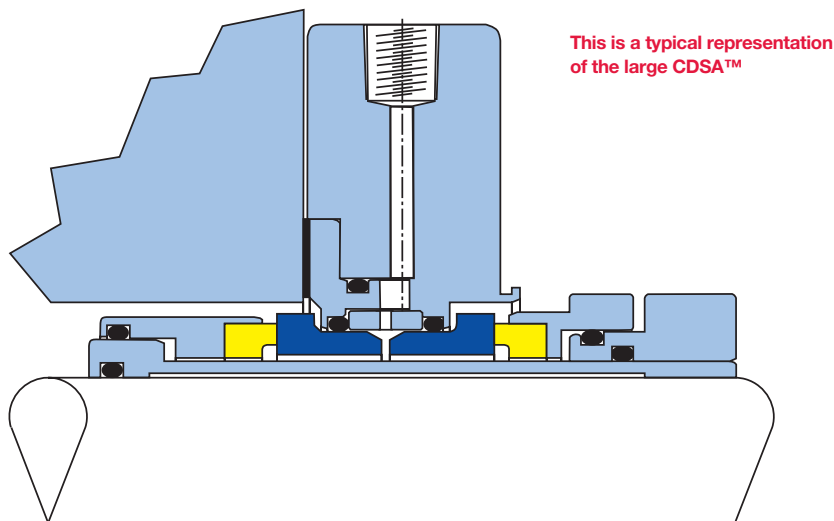

CDSA™ Range - Size Charts

CDSA™ Range - Dimensional Information (inches)

A	B	C	D	E	ØFMin	ØFMax	ØGMin	ØGMax	ØHMax	I	J
1.000	4.125	2.125	1.937	0.519	1.625	1.937	2.687	3.562	1/2	1.281	2.062
1.125	4.250	2.250	2.063	0.519	1.750	2.062	2.812	3.617	1/2	1.281	2.062
1.250	4.375	2.375	2.187	0.519	1.875	2.187	2.937	3.812	1/2	1.281	2.062
1.375	4.375	2.500	2.312	0.519	2.000	2.250	3.062	3.812	1/2	1.281	2.062
1.500	5.000	2.812	2.562	0.644	2.250	2.375	3.375	4.437	1/2	1.312	2.125
1.625	5.000	2.812	2.562	0.644	2.375	2.500	3.375	4.437	1/2	1.312	2.125
1.750	5.500	3.187	2.812	0.644	2.500	2.750	3.750	4.937	1/2	1.312	2.125
1.875	5.500	3.187	2.812	0.644	2.625	2.875	3.750	4.937	1/2	1.312	2.125
2.000	6.000	3.562	3.063	0.644	2.750	3.000	4.125	5.437	1/2	1.380	2.125
2.000-AC	5.250	3.450	3.035	0.644	2.750	3.000	4.000	4.750	1/2	1.380	2.125
2.125	6.000	3.562	3.063	0.644	2.875	3.125	4.125	5.437	1/2	1.380	2.125
2.250	6.500	3.812	3.312	0.644	3.000	3.250	4.500	5.812	5/8	1.380	2.125
2.375	6.500	3.812	3.312	0.644	3.125	3.375	4.500	5.812	5/8	1.380	2.125
2.500	7.000	4.312	3.812	0.769	3.375	3.625	5.000	6.312	5/8	1.500	2.375
2.625	7.000	4.312	3.812	0.769	3.500	3.750	5.000	6.312	5/8	1.500	2.375
2.750	7.000	4.312	3.812	0.769	3.625	3.875	5.000	6.312	5/8	1.500	2.375
2.875	7.500	4.937	4.250	0.769	3.750	4.125	5.625	6.812	5/8	1.500	2.375
3.000	7.500	4.937	4.250	0.769	3.875	4.250	5.625	6.812	5/8	1.500	2.375
3.125	7.500	4.937	4.250	0.769	4.000	4.375	5.625	6.812	5/8	1.500	2.375
3.250	8.000	5.312	4.625	0.769	4.125	4.500	6.125	7.187	3/4	1.500	2.375
3.375	8.000	5.312	4.625	0.769	4.250	4.625	6.125	7.187	3/4	1.500	2.375
3.500	8.000	5.312	4.625	0.769	4.375	4.750	6.125	7.187	3/4	1.500	2.375
3.625	8.500	5.937	5.000	0.769	4.500	5.000	6.750	7.687	3/4	1.500	2.375
3.750	8.500	5.937	5.000	0.769	4.625	5.125	6.750	7.687	3/4	1.500	2.375
3.875	8.500	5.937	5.000	0.769	4.750	5.250	6.750	7.687	3/4	1.500	2.375
4.000	9.000	6.625	5.375	0.769	4.875	5.500	7.437	8.187	3/4	1.500	2.375
4.125	9.000	6.625	5.375	0.769	5.125	5.875	7.437	8.187	3/4	1.500	2.375
4.250	9.000	6.625	5.375	0.769	5.125	5.875	7.437	8.187	3/4	1.500	2.375
4.375	9.500	7.000	5.750	0.769	5.375	6.250	7.812	8.687	3/4	1.500	2.375
4.500	9.500	7.000	5.750	0.769	5.375	6.250	7.812	8.687	3/4	1.500	2.375
4.625	10.000	7.345	6.125	0.769	5.625	6.625	8.312	9.062	7/8	1.500	2.375
4.750	10.000	7.345	6.125	0.769	5.625	6.625	8.312	9.062	7/8	1.500	2.375
4.875	10.000	7.345	6.125	0.769	5.875	6.625	8.312	9.062	7/8	1.500	2.375
5.000	10.000	7.345	6.125	0.769	5.875	6.625	8.312	9.062	7/8	1.500	2.375

Seal sizes from 5.125" to 12.000" are designed to suit specific equipment using modular components. Note: Seal sizes 6.125" and above are supplied without a pivot ring. Contact AESSEAL® technical department for dimensional information and availability.

“Factory repair program is available”

"Replacement seal kits are available"

CDSA™ Range - Dimensional Information (mm)

A	B	C	D	E	ØFMin	ØFMax	ØGMin	ØGMax	ØHMax	I	J
24	104.8	54.0	49.2	13.2	40.0	46.0	67.0	90.5	12	32.5	52.4
25	104.8	54.0	49.2	13.2	41.0	49.0	67.0	90.5	12	32.5	52.4
28	108.0	57.2	52.4	13.2	44.0	52.3	70.3	93.6	12	32.5	52.4
30	111.0	60.4	55.6	13.2	46.0	55.5	73.5	96.8	12	32.5	52.4
32	111.0	60.4	55.6	13.2	48.0	55.5	73.5	96.8	12	32.5	52.4
33	111.0	60.4	55.6	13.2	49.0	55.5	73.5	96.8	12	32.5	52.4
35	111.0	63.5	58.8	13.2	51.0	57.5	76.6	96.8	12	32.5	52.4
38	127.0	71.5	65.0	16.4	57.2	60.3	85.7	114.3	12	33.3	54.0
40	127.0	71.5	65.0	16.4	58.0	60.4	85.7	114.3	12	33.3	54.0
43	127.0	71.5	65.0	16.4	61.0	63.5	85.7	114.3	12	33.3	54.0
45	139.7	81.0	71.4	16.4	63.5	69.9	95.3	127.0	12	33.3	54.0
48	139.7	81.0	71.4	16.4	66.7	73.0	95.3	127.0	12	33.3	54.0
50	139.7	81.0	71.4	16.4	68.0	73.0	95.3	127.0	12	33.3	54.0
53	152.4	90.5	77.8	16.4	71.0	76.2	104.8	139.7	12	35.0	54.0
55	152.4	90.5	77.8	16.4	74.0	79.4	104.8	139.7	12	35.0	54.0
58	165.1	96.8	84.1	16.4	76.2	82.5	114.3	149.2	16	35.0	54.0
60	165.1	96.8	84.1	16.4	79.4	85.7	114.3	149.2	16	35.0	54.0
63	177.8	109.5	96.8	19.6	85.8	92.1	127.0	160.3	16	38.1	60.3
65	177.8	109.5	96.8	19.6	88.9	95.3	127.0	160.3	16	38.1	60.3
68	177.8	109.5	96.8	19.6	92.1	98.4	127.0	160.3	16	38.1	60.3
70	177.8	109.5	96.8	19.6	92.1	98.4	127.0	160.3	16	38.1	60.3
75	190.5	125.4	108.0	19.6	98.5	108.0	142.9	173.0	16	38.1	60.3
80	190.5	125.4	108.0	19.6	101.6	111.1	142.9	173.0	16	38.1	60.3
85	203.2	135.0	117.5	19.6	108.0	117.5	155.6	182.5	20	38.1	60.3
90	215.9	150.8	127.0	19.6	114.3	127.0	171.5	195.2	20	38.1	60.3
95	215.9	150.8	127.0	19.6	117.5	130.2	171.5	195.2	20	38.1	60.3
100	228.6	168.3	136.5	19.6	123.9	139.7	189.0	208.0	20	38.1	60.3
105	228.6	168.3	136.5	19.6	130.1	149.2	189.0	208.0	20	38.1	60.3
110	241.3	177.8	146.2	19.6	136.5	158.8	198.4	220.6	20	38.1	60.3
115	254.0	186.6	155.8	19.6	142.9	168.3	211.1	230.2	22	38.1	60.3
120	254.0	186.6	155.8	19.6	142.9	168.3	211.1	230.2	22	38.1	60.3
125	254.0	186.6	155.8	19.6	149.2	168.3	211.1	230.2	22	38.1	60.3

Seal sizes from 130mm to 300mm are designed to suit specific equipment using modular components. Note: Seal sizes 155mm and above are supplied without a pivot ring. Contact AESSEAL® technical department for dimensional information and availability.

Bi-Metal CDSA™ - Double Cartridge Mechanical Seal


AESSEAL® has designed an innovative “bi-metal” exotic alloy seal. Alloy 20, Alloy 276, Alloy 400 and Titanium grade 2 are inventoried in popular modular wetted component sizes. Any additional commercially available special alloys are made to order. These special alloy parts are fitted to the standard Stainless Steel components. The use of a neutralizing barrier fluid protects the secondary Stainless Steel parts that are not exposed to the process fluid during normal operation.

Availability and flexibility of design meets the special demands of the corrosive fluid containment market.


Variations to the seal specification can be accomplished by selecting from many different options. Seal faces are offered in any combination of Silicon Carbide, Tungsten Carbide and Carbon, both inboard and outboard.

Alternate ‘O’ ring compounds in Aflas®, Ethylene Propylene and Kalrez® are available.

The standard CDSA™ design works as a double seal with either a higher or lower barrier fluid pressure differential, when compared to the process fluid pressure.

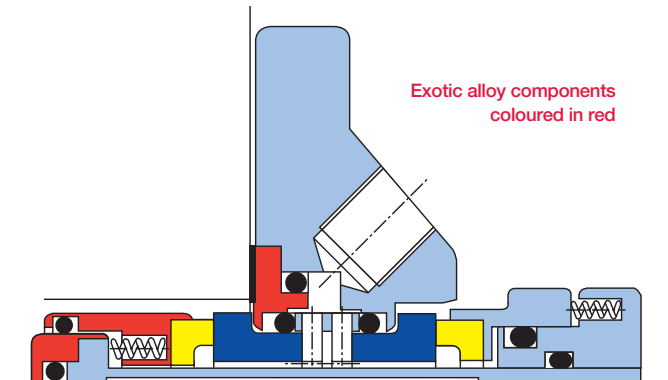

CDSA™ - Double Cartridge Mechanical Seal

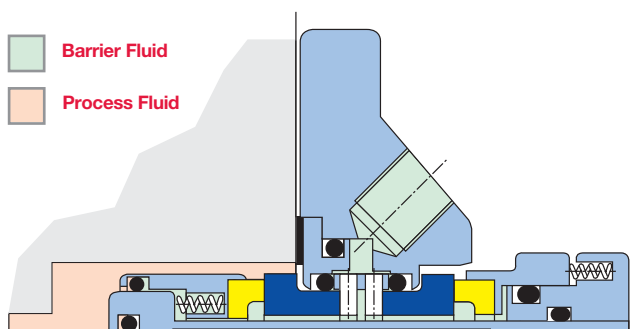

Barrier Fluid

The barrier fluid pressure should not normally be more than 15 psig (1 barg) above the stuffing box pressure.

Higher Pressure Barrier Fluid


A barrier fluid pressure which is higher than the stuffing box pressure, prevents the pumped product from entering the barrier fluid system and ultimately leaking to atmosphere.

Lower Pressure Barrier Fluid


When used at a lower pressure than the stuffing box condition, the barrier fluid can serve as a coolant, provide lubrication for dry running conditions, or help to prevent the build-up of crystallized particles at the internal seal faces.

Back-up Containment System

Convection tanks provide a closed-loop containment system with a pressurized barrier fluid. Tank options with internal cooling coils enhance the temperature control at the seal on critical duties. Use of ASME coded vessels and assistance with layout specifications maximizes back-up protection.

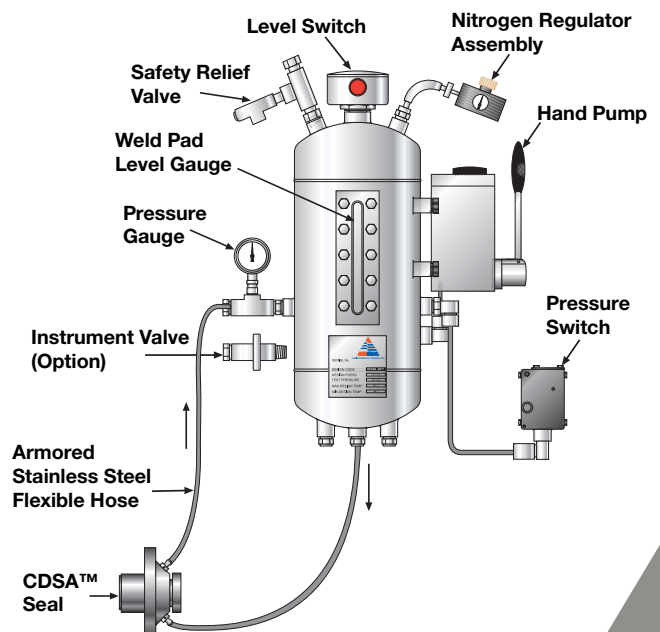

ANSI+ CDSA™ - Gland Designs to suit ANSI+ Pumps

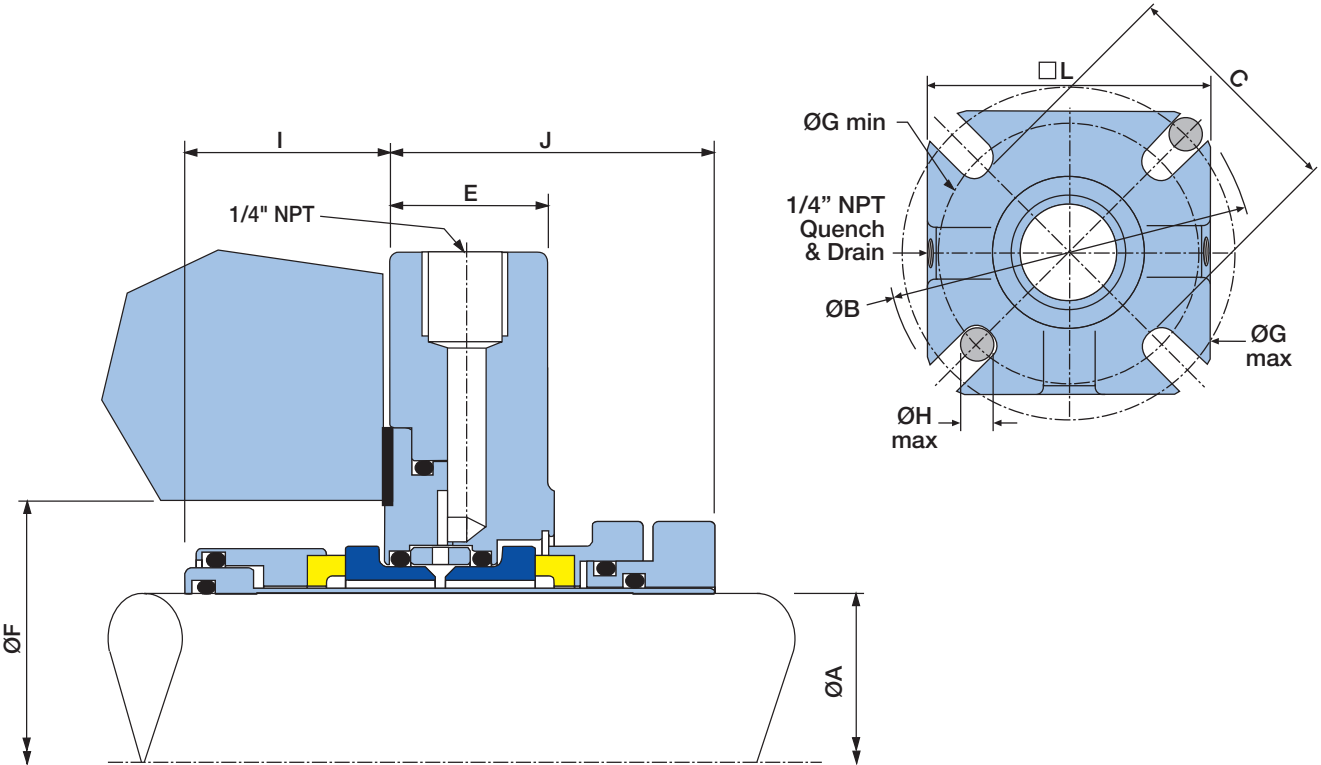

ANSI+ CDSA™ - ANSI+ Gland format Dimensional Information (inches)

A	B	C	E	F Min	F Max	G Min	G Max	H Max	I	J	□L
1.125	5.000	3.188	1.000	2.625	2.850	3.750	4.250	0.500	1.250	2.000	3.990
1.375	5.375	3.438	1.000	2.875	3.100	4.000	4.625	0.500	1.250	2.000	4.240
1.750	6.750	4.438	0.644	3.500	4.100	5.000	6.000	0.500	1.350	2.000	5.480
1.875	6.750	4.438	0.644	3.625	4.100	5.000	6.000	0.500	1.350	2.000	5.480
2.125	7.625	4.688	0.644	3.875	4.225	5.375	6.687	0.625	1.437	2.000	6.230
2.500	8.250	5.438	0.644	4.500	5.100	6.125	7.312	0.625	1.500	2.187	6.730
2.625	8.250	5.438	0.644	4.625	5.100	6.125	7.312	0.625	1.500	2.187	6.730
2.750	8.250	5.438	0.644	4.625	5.100	6.125	7.312	0.625	1.500	2.187	6.730

Minimum bolt circle based on bolt size shown.

Environmental Control Systems for the CDSA™

In addition to a vast range of mechanical seals, AESSEAL® has a specialized systems division, dedicated to the design and manufacture of a comprehensive range of seal support packages for double mechanical seals. These support systems range from Thermosyphon systems, SWFF-TF™, FLOWTRUE™ and AES-15™ to the fully featured forced circulation system PUMPPAC™ for use on oil and water applications.

SWFF-TF™



FLOWTRUE™



AES-15™




PUMPPAC™



The systems above are compatible with a wide selection of barrier and buffer fluid media. They are supplied pre-assembled with all necessary components and fittings. On site inventory costs are reduced by modular system construction.

CURC™ - Single Cartridge Mechanical Seal

The CDSA™ range of double cartridge mechanical seals is designed to complement the CURC™ range of cartridge single mechanical seals. Available from 1.000" to 5.000" (24mm to 125mm) and available in sizes up to 12.000" (300mm). The CURC™ incorporates self-aligning faces.

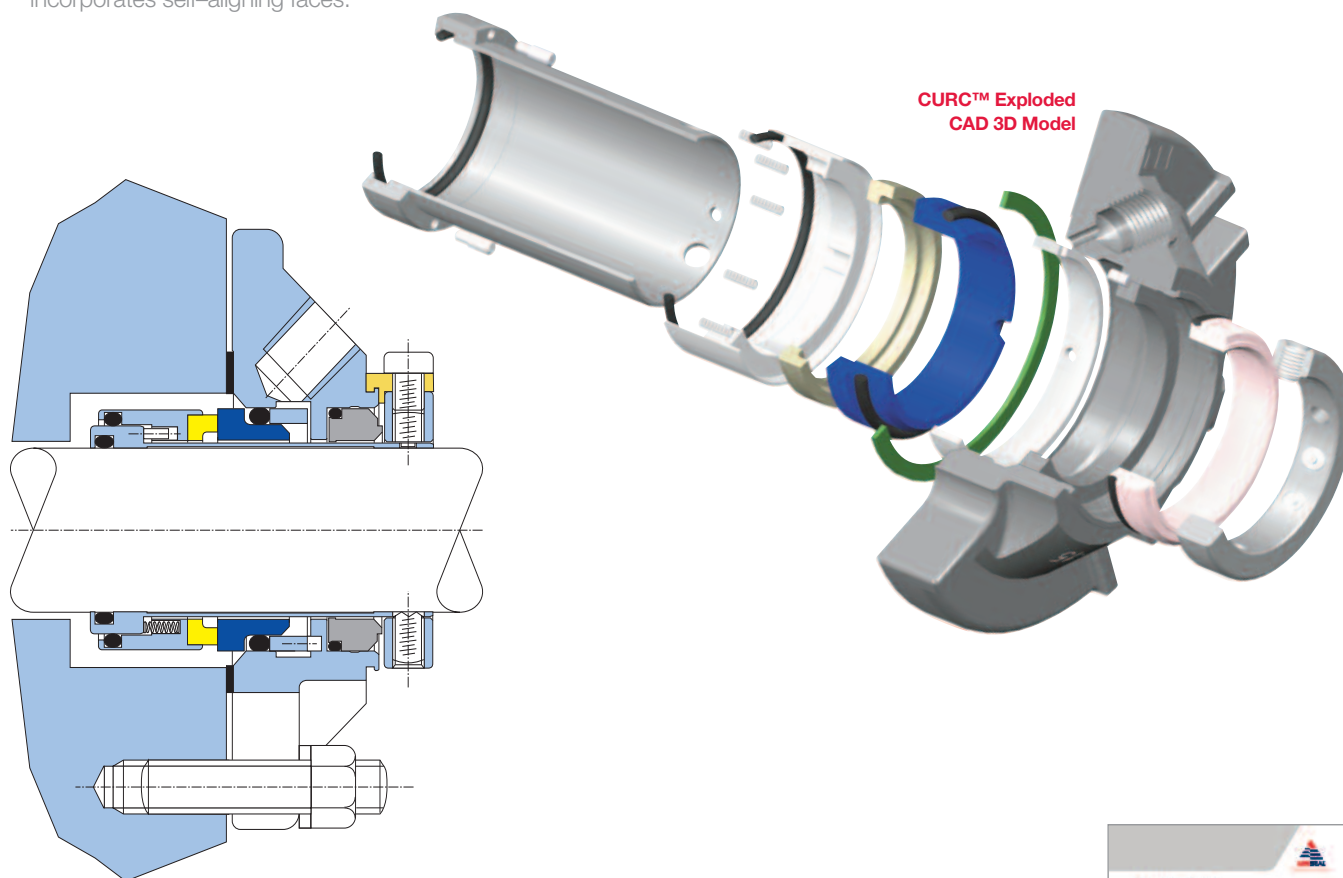

The CURC™ is available as a CRCO™ which includes a lip seal option. It is also available as a CURE™ which incorporates a secondary seal option to bridge the gap between a single and a double seal. Both CURC™ and CDSA™ products employ modular components, thereby increasing availability and reducing product lead time.

This CURC™ brochure is available by contacting the Marketing Department at marketing@aes seal.com or can be downloaded by visiting our website at www.aes seal.com



This document is designed to provide dimensional information and an indication of availability. For further information and safe operating limits contact our technical specialists at the locations below.



UK Sales & Technical advice:
AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham
S60 1BZ
United Kingdom

Tel: +44 (0) 1709 369966
Fax: +44 (0) 1709 720788
E-mail: seals@aes seal.com

Distributed by:

'Our purpose is to give our customers such exceptional service that they need never consider alternative sources of supply.'

www.aes seal.com

USA Sales & Technical advice:
AESSEAL Inc.
355 Dunavant Drive
Rockford
TN. 37853
USA

Tel: +1 865 531 0192
Fax: +1 865 531 0571
E-mail: usa@aes seal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AESSEAL plc, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.

LN-UK/US-CDSA-02PDF Copyright © 2012 AESSEAL plc 04/2012