


STYLE 210

100% Para-Aramid continuous fibre with PTFE impregnation and dynamic run in lubricant, silicon oil free



Main areas of application:

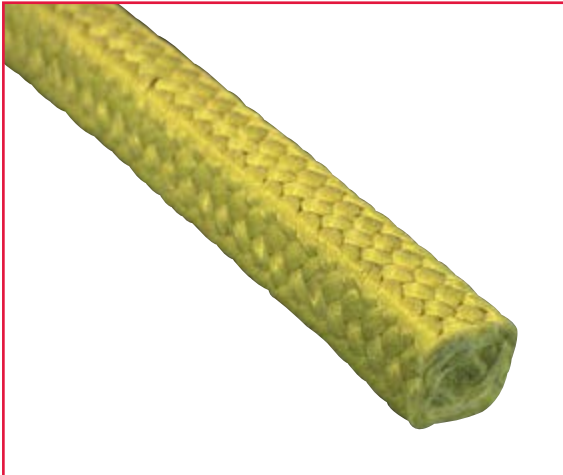


- Centrifugal pumps
- kneading devices
- agitators
- refiners
- mixers

Characteristics:

- Excellent for abrasive fluids, very wear resistant, universal packing in every industrial area which handles slurries and solids in products
- Very little monitoring required, short run-in period
- Shaft or shaft sleeve HRC 60 recommended

Suitable for:

- Chemical, Sewage, Paper and Pulp industries

			
p [bar]	25	100	250
v [m/s]	25	2	-
t °C	-100 ... +280 (200*)		
pH	2 - 12		
g/cm ³	1.30		

*practically useful data

Form of delivery:

This packing can be manufactured from 4 to 40 mm square as well as in intermediate, inch sizes and special measurements.

04 - 09 mm	on	1 kg spool	Special length, pre-cut or die formed rings on request.
10 - 15 mm	on	2.5 kg spool	
16 - 25 mm	on	5 kg spool	

1 kg of packing of the following cross-sections is equivalent to displayed metre lengths:

[size]	04	05	06	07	08	09	10	12	13	14	15	16	18	19	20	22	25
[m]	46	30	21	15	12	9.1	7.4	5.1	4.4	3.8	3.3	2.9	2.3	2.1	1.9	1.5	1.2

All technical information and advice is based on our experience and will be given most conscientiously but without any liability. Indication and figures need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

AESSEAL plc
Packing Division Europe
 Rudolf-Diesel-Ring 26a
 D-82054 Sauerlach
 Germany

Telefon: +49 8104 6640-21
 Telefax: +49 8104 6640-44
 Email: packing.euro@aes seal.com
 Internet: http://www.aes seal.com

Distributed by:

Our Purpose: "To give our customers such exceptional service that they need never consider alternative sources of supply."