

GAS10™

Gas Support System



Features

- Coalescing filter
- Non-return valve
- Dual flow indicators
- Components are enclosed in a secure cabinet (this does not apply to the intrinsically safe and explosion proof versions)

Benefits

- Ensures that a clean gas supply is feeding the seal
- Prevents product contamination of the gas panel during upset conditions
- Allows primary flow indication and secondary alarm condition
- Protects the components from the industrial environment



The modular GAS10™ seal support system is designed to supply inert gas (e.g. Air or Nitrogen) to mechanical seals on processes that cannot tolerate contamination by water or oil barrier fluids. The self contained system (Figure 1) has a maximum inlet pressure of 14 Bar / 203 psig and a maximum outlet pressure of 10 Bar / 145 psig enabling it to be used on a wide range of applications. A Gas Panel can be used to purge vapour build up in seal cavities. The modular nature of the system enables the upgrading of the GAS10™ so it can be used in Intrinsically Safe and Explosion Proof zoned environments (Figure 2). This modular design also enables the incorporation of a number of optional extras with the system including a humidifier and flow switch.


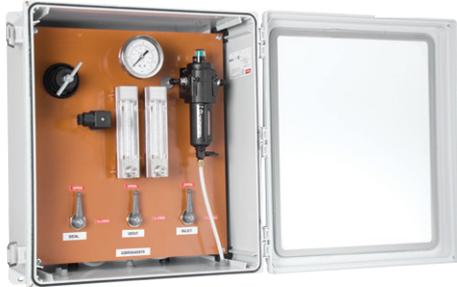


Figure 1: All instruments are contained within the cabinet.



Figure 2: Intrinsically safe version of the Gas Panel.

GAS10™ P & ID

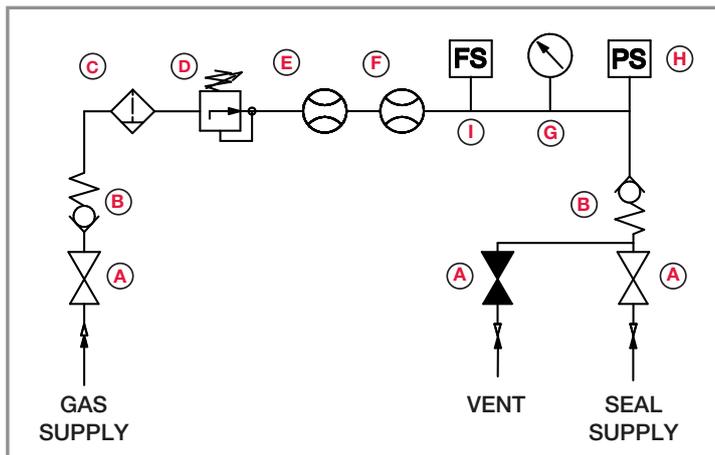

Item Description

A	Ball valve
B	Check valve
C	Coalescing filter
D	Pressure regulator
E	Flow meter (high)
F	Flow meter (low)
G	Pressure gauge
H	Pressure switch
I	Flow limit switch



Mixmaster VII™ Seal

Note: The Gas Panel System may be fitted to non-AESSEAL® hydrodynamic dry running technology seals.

*AESSEAL® Mixmaster VII™ seals are not supplied with the GAS10™ Support System.

This document is designed to provide dimensional information and an indication of availability. For further information and safe operating limits contact our technical specialists at the locations below.



UK Sales & Technical advice:

AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham
S60 1BZ
United Kingdom

Tel: +44 (0) 1709 369966
Fax: +44 (0) 1709 720788
E-mail: seals@aesseal.com



Distributed by:

'Our purpose is to give our customers such exceptional service that they need never consider alternative sources of supply.'



INVESTOR IN PEOPLE



USA Sales & Technical advice:

AESSEAL Inc.
355 Dunavent Drive
Rockford
TN. 37853
USA

Tel: +1 865 531 0192
Fax: +1 865 531 0571
E-mail: usa@aesseal.com

www.aesseal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AESSEAL plc, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.